

MIDWAY ROLL FORMING

PRODUCT CATALOG

Roof Deck / Form Deck / Composite Deck

CUSTOM LENGTHS. DEPENDABLE PROJECT SUPPORT.

CHICAGO, ILLINOIS | NOVEMBER 2026

01 / PRODUCT GUIDE

Find your deck

Steel decking for commercial roofs and concrete floor construction. Choose the product family, then confirm the project specifications with our sales team.

Product	Profiles	Supply
B roof deck	1.5 inch Type B	Manufactured by Midway
Form deck	1.5 inch	Manufactured by Midway
Form deck	9/16 inch	Supplied by Midway
Composite floor deck	1.5 inch	Manufactured by Midway
Composite floor deck	2 inch / 3 inch	Supplied by Midway

Built to your length

Custom lengths from 8 ft to 40 ft in 1 inch increments are advertised for roll-formed orders. Confirm length limits for supplied profiles when requesting a quote.

02 / ROOF DECK

1.5 inch Type B deck

A structural platform for commercial roof assemblies, supporting insulation, weatherproofing and other roofing materials over joists or steel beams.



Specification	Published options
Profile depth	1.5 inch
Gauges	22 / 20 / 18 / 16
Finishes	Galvanized G30 / G60 / G90 / Painted
Minimum yield strength	30 ksi; contact sales for higher-strength requirements
Supply	Manufactured and stocked by Midway


Applications include commercial roofs and canopies. Roof deck is a supporting component of the roof assembly; it is not a watertight roofing surface.

PRODUCT DETAILS / midwayrollforming.com/b-deck/

03 / FORM DECK

Steel form deck

Permanent steel forms for poured, reinforced concrete slabs. Form deck replaces temporary wood forms and supports efficient floor construction.

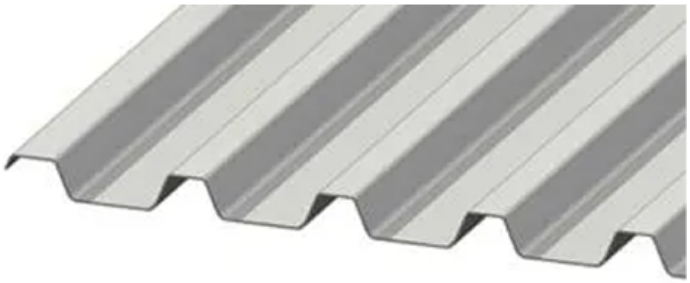

Specification	1.5 inch form deck
Gauges	22 / 20 / 18 / 16
Finishes	Galvanized G30 / G60 / G90 / Painted
Minimum yield strength	50 ksi
Supply	Manufactured and stocked by Midway
Also offered	9/16 inch non-composite form deck; confirm specifications


The website describes the 1.5 inch form profile as B deck installed inverted, with the larger rib on the bottom. Applications include concrete floors, stairways and shallow mezzanine designs.

PRODUCT DETAILS / midwayrollforming.com/form-deck/

04 / COMPOSITE FLOOR DECK

Concrete meets steel


Embossed deck panels grip the concrete, serving as permanent forms during placement and providing reinforcement in the designed composite floor system.

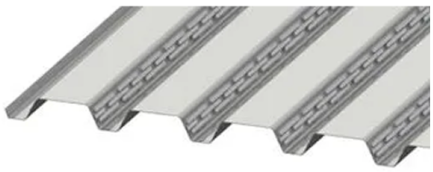

1.5 inch



2 inch

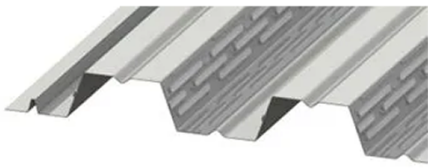

3 inch

Specification	Published options
Profile depths	1.5 inch / 2 inch / 3 inch
Gauges (all three depths)	22 / 20 / 18 / 16
Finishes (all three depths)	Galvanized G30 / G60 / G90 / Painted
Minimum yield strength	50 ksi
Supply	1.5 inch: manufactured and stocked by Midway. 2 inch and 3 inch: supplied by Midway.

Concrete thickness, reinforcement, spans, loads and attachments must follow the project design. Confirm the selected profile and current availability with sales.

PRODUCT DETAILS / midwayrollforming.com/composite-deck/

05 / QUOTING & DELIVERY

Start your next project

Send your material requirements to our sales team for pricing, availability and pickup or delivery coordination.

262-337-0627

sales@midwayrollforming.com

2310 W 58th St, Chicago, IL 60636

Include with your quote request

Product profile and depth / Gauge / Finish
Sheet quantity or total square footage / Length of each sheet
Required date / Pickup or delivery location / Project specifications

Custom cutting: Advertised roll-forming lengths are 8 ft to 40 ft in 1 inch increments. Custom-cut decking is not returnable.

Pickup and delivery: Quotes are typically will-call. Delivery may be available for an additional charge. Ask sales to confirm pickup or delivery timing for your order.

Business hours: Monday-Friday, 8 am-5 pm. Weekends are for emergency or scheduled work only.

Catalog based on midwayrollforming.com, reviewed November 4, 2026. Pricing, stock and lead times are confirmed by quotation. This catalog is a product overview; use project-approved engineering data for loads, spans, coverage, reinforcement and fastening.

REQUEST A QUOTE / midwayrollforming.com/contact-us/